



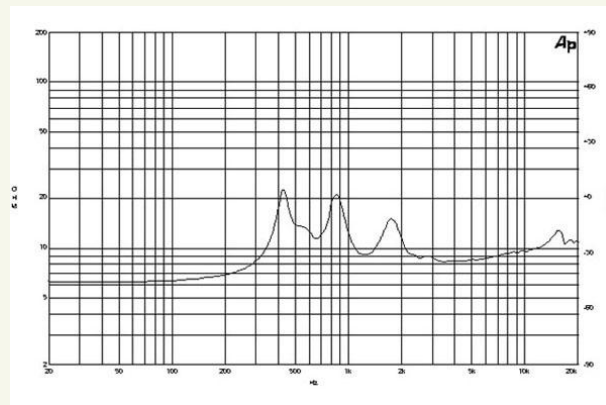

DE85TN | HF Drivers

220 W continuous program power capacity
2" horn throat diameter
75 mm (3 in) aluminium voice coil
Titanium diaphragm
500 – 18000 Hz response
107 dB sensitivity
Shorting copper cap for extended HF response

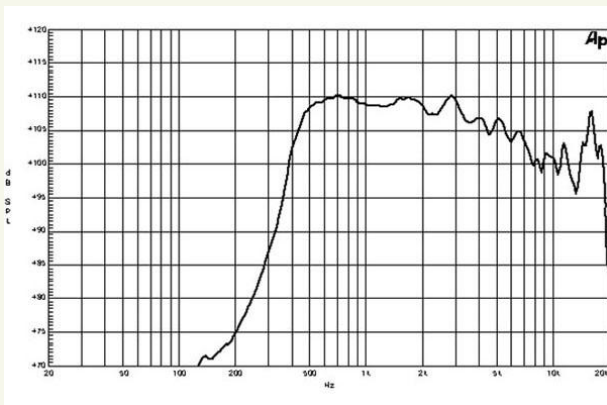

Specifications

Throat Diameter (1)	50 mm (2 in)
Nominal Impedance (2)	8 ohm
Minimum Impedance	8.2 ohm
Nominal Power Handling (3)	110 W
Continuous Power Handling (4)	220 W
Sensitivity (1W/1m) (5)	107 dB
Frequency Range	0.5 -18 kHz
Recommended Crossover (6)	1 kHz
Voice Coil Diameter	75 mm (3 in)
Winding Material	Aluminium
Inductance	0.14 mH
Diaphragm Material	Titanium
Flux Density	1.8 T

Mounting and Shipping Info

Four M6 holes 90° on 102 mm (4 in) diameter	
Overall Diameter	170 mm (6.7 in)
Depth	64 mm (2.5 in)
Net Weight (1 unit)	4.5 kg (9.9 lb)
Shipping Weight (2 units)	9.6 kg (21.2 lb)
Shipping Box (2 units)	210x210x190 mm (8.3x8.3x7.5 in)

- ¹Driver mounted on B&C ME75 horn
- ²Also available in 16 ohms, data upon request
- ³2 hours test made with continuous pink noise signal (6 dB crest factor) within the specified range . Power calculated on rated minimum impedance.
- ⁴Power on Continuous Program is defined as 3 dB greater than the Nominal rating.
- ⁵Applied RMS Voltage is set to 2.83V for 8 ohms Nominal Impedance.
- ⁶12 dB/oct. or higher slope high-pass filter.

Horns
HF Drivers
Coaxials
LF Nd Drivers
LF Drivers

